

Artigo

[Robert Cemper](#) · Fev. 7, 2022 1min de leitura


GlobalToJSON--embeddedPython

Este é um pacote para exportar um arquivo de objeto global para JSON e recriá-lo recarregando a partir deste arquivo

embeddedPython refere-se às novas tecnologias disponíveis. Deve ser entendido como um exercício de aprendizagem de como lidar com as interfaces de linguagem.

Apenas os nós de Globals que contêm dados são apresentados no arquivo JSON gerado.

 = Stored Content

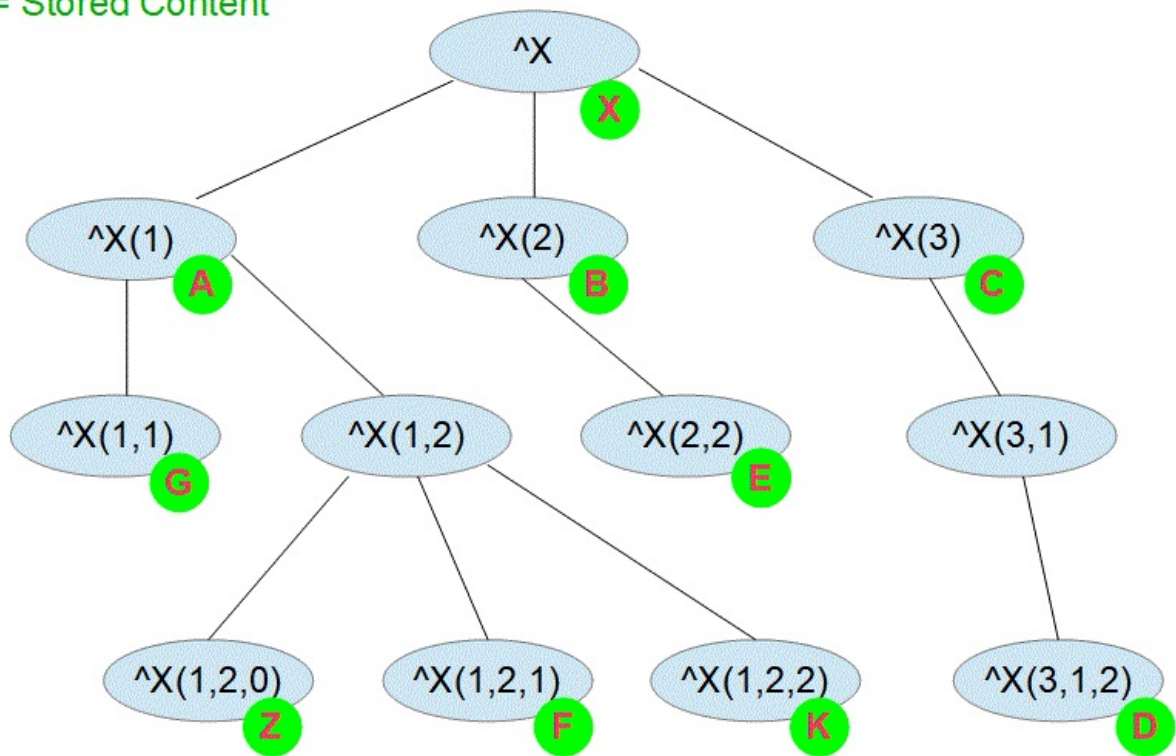

Exportamos este Global.

View global in namespace USER:

Global Search Mask: ^dc.MultiD		Display	Cancel
Search History: ^dc.MultiD		Maximum Rows: 100	☐ Allow Edit
1:	^dc.MultiD	= 5	
2:	^dc.MultiD(1)	= \$lb("Braam,Ted Q.",51353)	
3:	^dc.MultiD(1,"mJSON")	= "{}"	
4:	^dc.MultiD(2)	= \$lb("Klingman,Uma C.",62459)	
5:	^dc.MultiD(2,2,"Multi","a")	= 1	
6:	^dc.MultiD(2,2,"Multi","rob",1)	= "rcc"	
7:	^dc.MultiD(2,2,"Multi","rob",2)	= 2222	
8:	^dc.MultiD(2,"Multi","a")	= 1	
9:	^dc.MultiD(2,"Multi","rob",1)	= "rcc"	
10:	^dc.MultiD(2,"Multi","rob",2)	= 2222	
11:	^dc.MultiD(2,"mJSON")	= {"A":"ahahah","Rob":"VIP","Rob2":1111,"Rob3":true}	
12:	^dc.MultiD(3)	= \$lb("Goldman,Kenny H.",45831)	
13:	^dc.MultiD(3,"mJSON")	= "{}"	
14:	^dc.MultiD(4)	= \$lb("","")	
15:	^dc.MultiD(4,"mJSON")	= {"rcc":122}	
16:	^dc.MultiD(5)	= \$lb("","")	
17:	^dc.MultiD(5,"mJSON")	= "{}"	
Total: 17 [End of global]			

Este é o conteúdo do arquivo gerado.

```

1  [{"gbl": [
2    {"node": "^dc.MultiD", "val": "5"}
3    {"node": "^dc.MultiD(1)", "val": "$lb(\"Braam,Ted Q.\",51353)"}
4    {"node": "^dc.MultiD(1,\"mJSON\")", "val": "{}"}
5    {"node": "^dc.MultiD(2)", "val": "$lb(\"Klingman,Uma C.\",62459)"}
6    {"node": "^dc.MultiD(2,2,\"Multi\",\"a\")", "val": "1"}
7    {"node": "^dc.MultiD(2,2,\"Multi\",\"rob\",1)", "val": "rcc"}
8    {"node": "^dc.MultiD(2,2,\"Multi\",\"rob\",2)", "val": "2222"}
9    {"node": "^dc.MultiD(2,\"Multi\",\"a\")", "val": "1"}
10   {"node": "^dc.MultiD(2,\"Multi\",\"rob\",1)", "val": "rcc"}
11   {"node": "^dc.MultiD(2,\"Multi\",\"rob\",2)", "val": "2222"}
12   {"node": "^dc.MultiD(2,\"mJSON\")", "val": "{\"A\":\"ahahah\",\"Rob\":\"VIP\",\"Rob2\":1111,\"Rob3\":true}"}
13   {"node": "^dc.MultiD(3)", "val": "$lb(\"Goldman,Kenny H.\",45831)"}
14   {"node": "^dc.MultiD(3,\"mJSON\")", "val": "{}"}
15   {"node": "^dc.MultiD(4)", "val": "$lb(\"\",\"\")"}
16   {"node": "^dc.MultiD(4,\"mJSON\")", "val": "{\"rcc\":122}"}
17   {"node": "^dc.MultiD(5)", "val": "$lb(\"\",\"\")"}
18   {"node": "^dc.MultiD(5,\"mJSON\")", "val": "{}"}
19 ]}]

```

E o Loader relacionado cria exatamente o mesmo Global

[Vídeo \(em inglês\)](#)

[#Globais #JSON #InterSystems IRIS](#)

URL de origem: <https://pt.community.intersystems.com/post/globaltojson-embeddedpython>